



*Application
and
Maintenance
Guide*



www.TimberProCoatings.com


Log Home Application

Log Yard Treatment:

In the case that the log home has been constructed but the season is close to the end and it will not be possible to coat for a number of months. It is recommended to apply the Log Yard Treatment, which will reduce the unwanted discoloration of the logs from weathering effects of the sun, and help reduce surface checking.

- a) Prior to application, the surface should be relatively free from dirt, discoloration, loose fibers and cambium layer.
- b) Apply one saturating coat of the Log Yard Treatment with a low-pressure garden pump sprayer. Allow the product to absorb and then brush out any runs or drips.
- c) Allow 16 hours for full dry.

Note: When you are ready to apply finishes, follow the preparation procedures for new wood-cleaning.

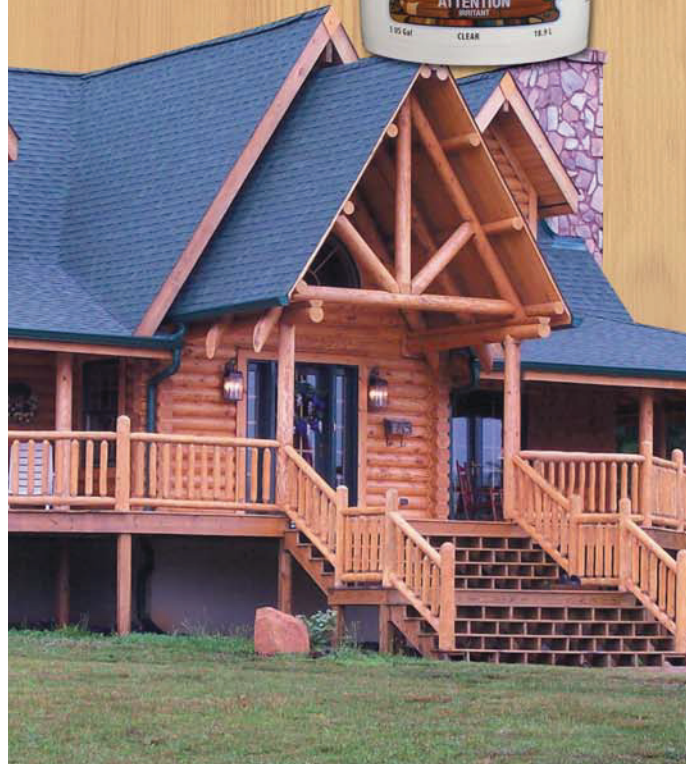



Timber Pro Coatings Canada

Unit 130-6251 Graybar Road
Richmond, BC, Canada V6W 1H3
Toll Free: 1-877-666-4244
Tel: (604) 270-4244
Email: canadainfo@timberprocoatings.com

06/2012

www.TimberProCoatings.com